FLOW REGULATOR

CFST-030-MHRR

2 WAYS COMBINATION ADJUSTABLE SETTING

ATLANTIC Fluid Tech

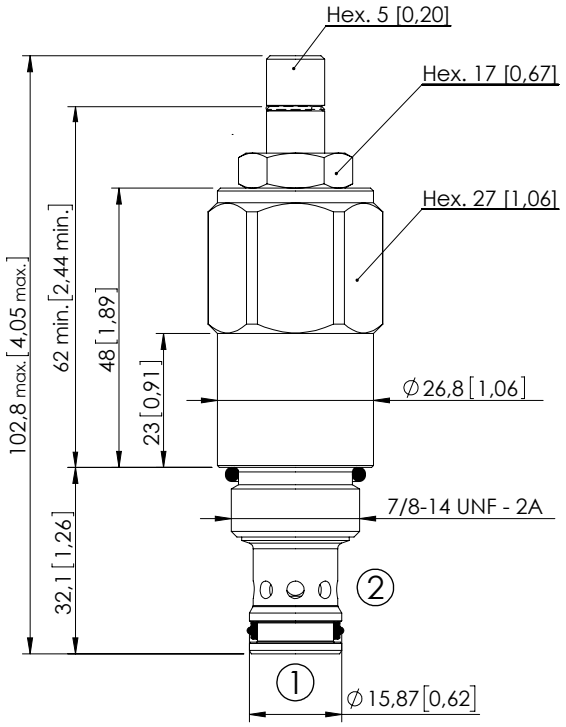

Dimensions: mm [inches]



SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	30 l/min (16 gpm)
Cavity:	SAE 10 2N
Weight:	0.26 kg (0,62 lbs)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RB600082
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
MTTFd:	150 years

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory.

OPTIONS



Screw and locknut

CURVES

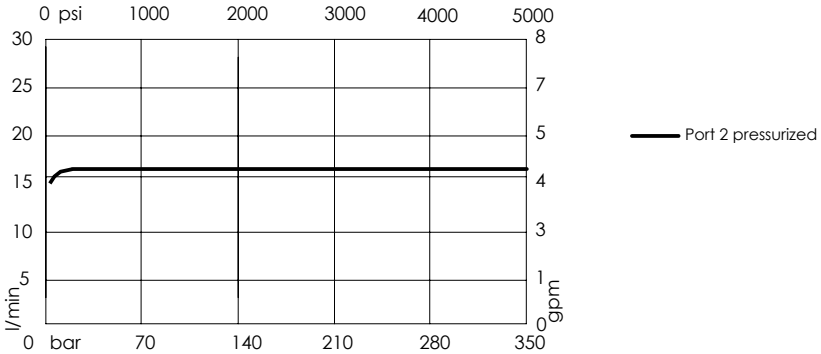

ORDERING CODES

Quick code	Description	Max. inlet flow	Regulated flow range	Adjustment
CF000440	CFST-030-MHRR-23-S10-N350	30 l/min (16 gpm)	15,5-22,5 l/min (4-6 gpm)	Screw nut locknut

Revision A